

XinleLux


2022 | PRODUCT
CATALOGUE



— Ancient town of China —




Slim round/square panel light

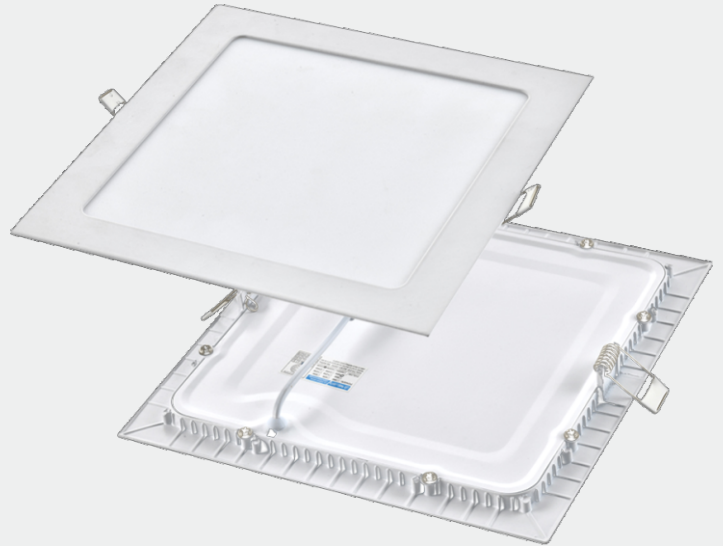


Product parameters

Slim Round panel light



Model	Power	Size(mm)	Cut-out(mm)	Color	luminous flux(lm/w)	RA	Qty
	3W	85mm	75mm	3000-7000K	35-45	≥70	2000PCS
	6W	120mm	100mm	3000-7000K	45-55	≥70	2000PCS
	9W	145mm	130mm	3000-7000K	55-60	≥70	2000PCS
	12W	160mm	145mm	3000-7000K	65-70	≥70	2000PCS
	15W	195mm	185mm	3000-7000K	65-70	≥70	2000PCS
	18W	221mm	200mm	3000-7000K	75-80	≥70	2000PCS
	24W	296mm	280mm	3000-7000K	70-75	≥70	1000PCS

Slim Square panel light




Model	Power	Size(mm)	Cut-out(mm)	Color	luminous flux(lm/w)	RA	Qty
	3W	85mm	75*75mm	3000-7000K	35-45	≥70	2000PCS
	6W	120mm	110*110mm	3000-7000K	45-55	≥70	2000PCS
	9W	145mm	135*135mm	3000-7000K	55-60	≥70	2000PCS
	12W	160mm	155*155mm	3000-7000K	65-70	≥70	2000PCS
	15W	195mm	175*175mm	3000-7000K	65-70	≥70	2000PCS
	18W	221mm	200*200mm	3000-7000K	75-80	≥70	2000PCS
	24W	295mm	285*285mm	3000-7000K	70-75	≥70	1000PCS




Product parameters

Surface round panel light



Model	Power	Size(mm)	Cut size(mm)	luminous flux(lm/w)	Color	RA	Qty
	6W	120mm	28mm/H	45-55	3000-7000K	≥70	2000pcs
	12W	160mm	28mm/H	65-70	3000-7000K	≥70	2000pcs
	18W	225mm	28mm/H	75-80	3000-7000K	≥70	2000pcs
	24W	290mm	28mm/H	70-75	3000-7000K	≥70	2000pcs


Slim Round panel light




Model	Power	Size(mm)	Cut size(mm)	luminous flux(lm/w)	Color	RA	Qty
	6W	120*120mm	28mm/H	45-55	3000-7000K	≥70	2000pcs
	12W	160*160mm	28mm/H	65-70	3000-7000K	≥70	2000pcs
	18W	221*221mm	28mm/H	75-80	3000-7000K	≥70	2000pcs
	24W	295*295mm	28mm/H	70-75	3000-7000K	≥70	2000pcs



Product parameters




Model	Power	Size(mm)	Cut-size(mm)	luminous flux(lm/w)	RA	Color	Qty
	10W	100mm	55-90mm	60-70	≥70	3000-7000k	2000PCS
	18W	120mm	75-90mm	75-85	≥70	3000-7000k	2000PCS
	24W	170mm	75-90mm	80-90	≥70	3000-7000k	2000PCS
	36W	225mm	75-90mm	80-90	≥70	3000-7000k	2000PCS




Model	Power	Size(mm)	Cut-size(mm)	luminous flux(lm/w)	RA	Color	Qty
	10W	100mm	55-90mm	60-70	≥70	3000-7000k	2000PCS
	18W	120*120mm	75-90mm	75-85	≥70	3000-7000k	2000PCS
	24W	170*170mm	75-90mm	80-90	≥70	3000-7000k	2000PCS
	36W	225*225mm	75-90mm	80-90	≥70	3000-7000k	2000PCS



Product parameters



Model	Power	Size(mm)	Cut Size(mm)	Color	luminous flux(lm/w)	RA	Qty
	18W	120mm	28mm/H	3000-7000k	65-70	≥70	2000PCS
	24W	170mm	28mm/H	3000-7000k	75-80	≥70	2000PCS
	36W	225mm	28mm/H	3000-7000k	80-90	≥70	2000PCS
	48W	300mm	28mm/H	3000-7000k	80-90	≥70	2000PCS



Model	Power	Size(mm)	Cut Size(mm)	Color	luminous flux(lm/w)	RA	Qty
	18W	120mm	28mm/H	3000-7000k	65-70	≥70	2000PCS
	24W	170mm	28mm/H	3000-7000k	75-80	≥70	2000PCS
	36W	225mm	28mm/H	3000-7000k	80-90	≥70	2000PCS
	48W	300mm	28mm/H	3000-7000k	80-90	≥70	2000PCS

XinleLux

T8/T5modulator tube



Productparameters



Model	Power	Size(m)	Input Voltage	Material	RA	Qty
	10W	0.6m	175-265V	Glass	≥70	3000PCS
	15W	0.6m	175-265V	Glass	≥70	3000PCS
	18W	1.2m	175-265V	Glass	≥70	3000PCS
	20W	1.2m	175-265V	Glass	≥70	3000PCS
	24W	1.2m	175-265V	Glass	≥70	3000PCS
	28W	1.2m	175-265V	Glass	≥70	3000PCS
	30W	1.2m	175-265V	Glass	≥70	3000PCS



Model	Power	Size(m)	Input Voltage	Material	RA	Qty
	10W	0.6m	175-265V	Glass	≥70	500PCS
	15W	0.6m	175-265V	Glass	≥70	500PCS
	18W	1.2m	175-265V	Glass	≥70	500PCS
	20W	1.2m	175-265V	Glass	≥70	500PCS
	24W	1.2m	175-265V	Glass	≥70	500PCS
	28W	1.2m	175-265V	Glass	≥70	500PCS
	30W	1.2m	175-265V	Glass	≥70	500PCS



Productparameters



Model	Power	Size(m)	Input Voltage	Material	RA	Qty
	5W	0.3m	175-265V	ALU+PS	≥70	500PCS
	9W	0.6m	175-265V	ALU+PS	≥70	500PCS
	13W	0.9m	175-265V	ALU+PS	≥70	500PCS
	18W	1.2m	175-265V	ALU+PS	≥70	500PCS



Model	Power	Size(m)	Input Voltage	Material	RA	Qty
	5W	0.3m	175-265V	Plastic	≥70	500PCS
	9W	0.6m	175-265V	Plastic	≥70	500PCS
	13W	0.9m	175-265V	Plastic	≥70	500PCS
	18W	1.2m	175-265V	Plastic	≥70	500PCS



Product parameters




Arch-flat-batten-light

Power:18W
Size(m):0.6m
Input Voltage:175-265V
Material: Iron+PP
RA: ≥ 70
Qty: 500PCS

Arch-flat-batten-light

Power:36W
Size(mm):1.2m
Input Voltage:175-265V
Material: Iron+PP
RA: ≥ 70
Qty: 500PCS




Square-flat-batten-light

Power:27W
Size(m):0.6m
Input Voltage:175-265V
Material: Alu+PC
RA: ≥ 70
Qty: 500PCS

Square-flat-batten-light

Power:54W
Size(m):1.2m
Input Voltage:175-265V
Material: Alu+PC
RA: ≥ 70
Qty: 500PCS



Square-flat-batten-light

Power:27W
Size(m):0.6m
Input Voltage:175-265V
RA: ≥ 70
Qty: 500PCS

Square-flat-batten-light

Power:54W
Size(m):1.2m
Input Voltage:175-265V
RA: ≥ 70
Qty: 500PCS




Product parameters



Model	Power	Size(mm)	Cut-out(mm)	Height-Size(mm)	Qty
	3+3W	105mm	75mm	32H	2000PCS
	6+3W	145mm	105mm	32H	2000PCS
	12+4W	195mm	155mm	32H	2000PCS
	18+6W	245mm	205mm	32H	2000PCS

Model	Power	Size(mm)	Cut-out(mm)	Height-Size(mm)	Qty
	3+3W	105*105mm	75*75mm	32H	2000PCS
	6+3W	145*145mm	105*105mm	32H	2000PCS
	12+6W	195*195mm	155*155mm	32H	2000PCS
	18+6W	245*245mm	205*205mm	32H	2000PCS

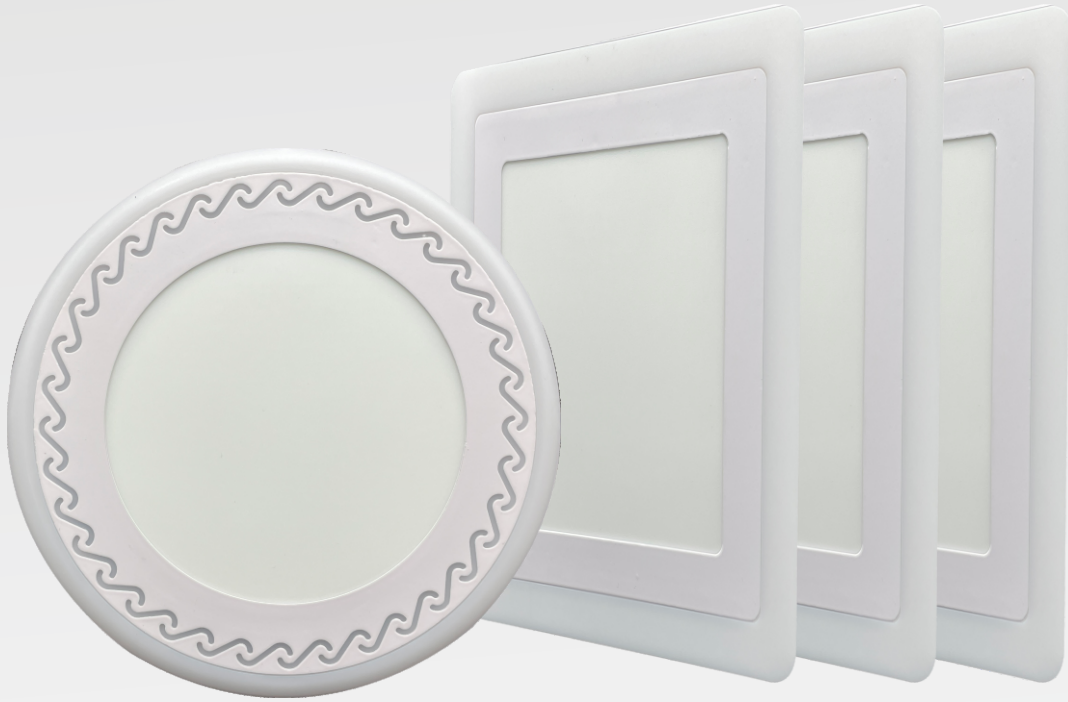


Product parameters



Model	Power	Size(mm)	Cut-out(mm)	Height-Size(mm)	Qty
	3+3W	105*105mm	75*75mm	32H	2000PCS
	6+3W	145*145mm	105*105mm	32H	2000PCS
	12+6W	195*195mm	155*155mm	32H	2000PCS
	18+6W	245*245mm	205*205mm	32H	2000PCS



Model	Power	Size(mm)	Cut-out(mm)	Height-Size(mm)	Qty
	3+3W	105mm	75mm	32H	2000PCS
	6+3W	145mm	105mm	32H	2000PCS
	12+4W	195mm	155mm	32H	2000PCS
	18+6W	245mm	205mm	32H	2000PCS

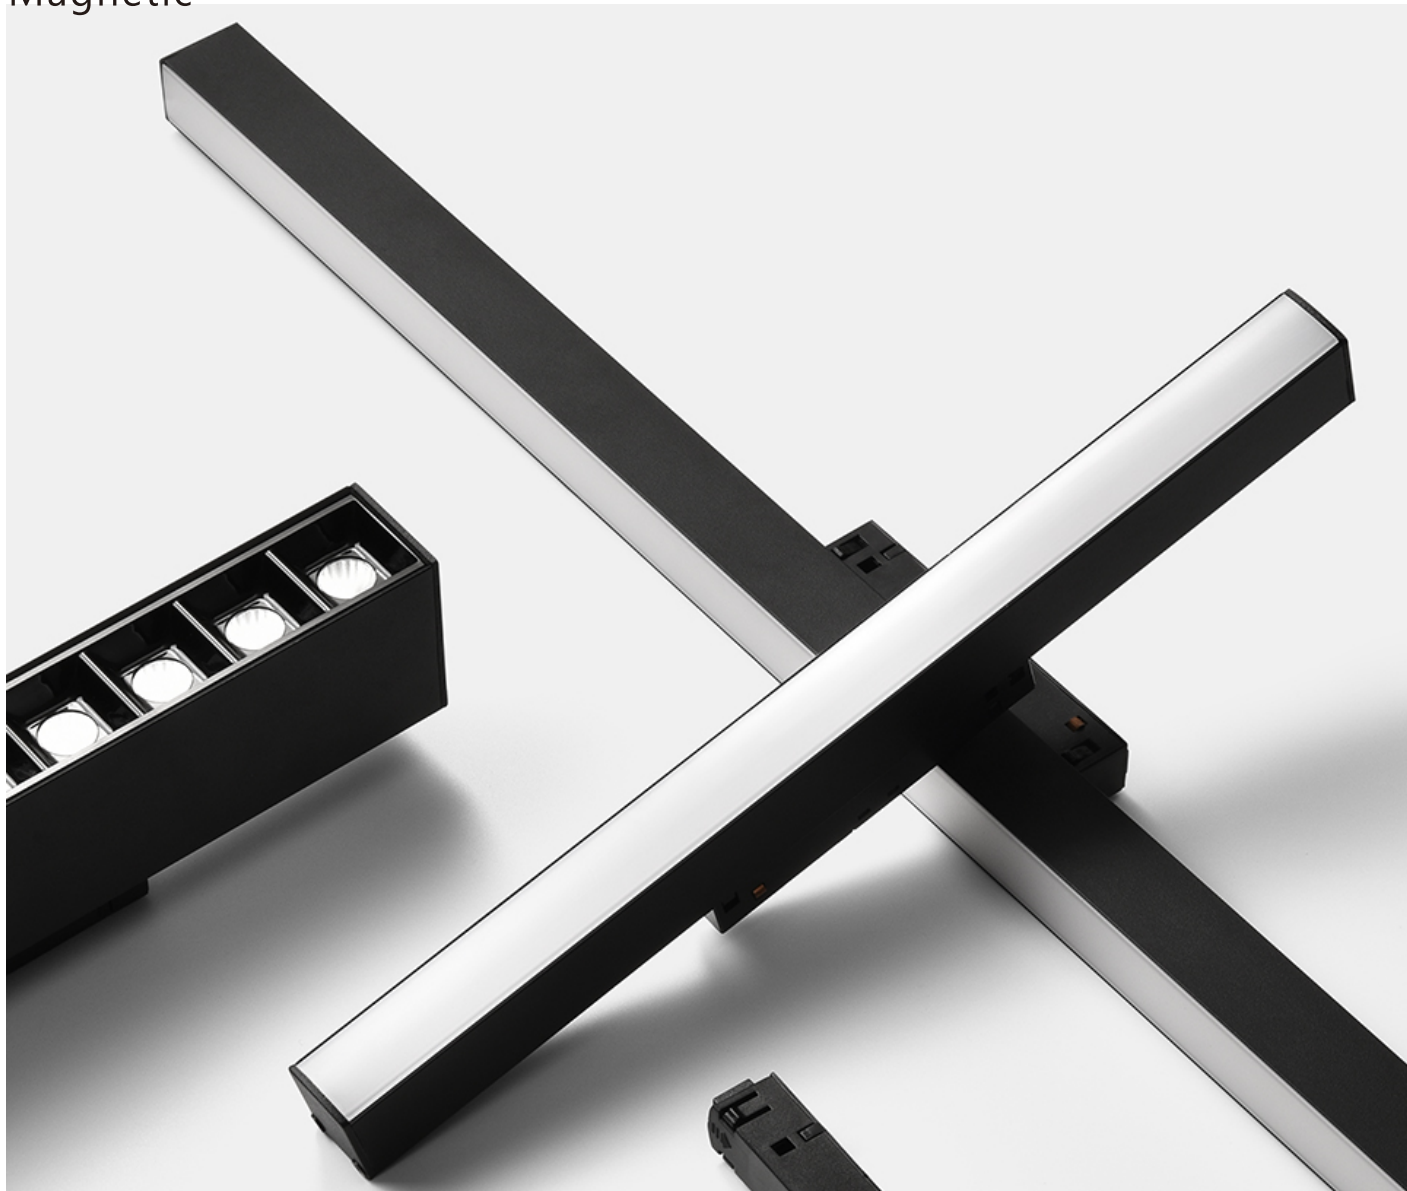

Productparameters



Model	Power	Size(m)	Input Voltage	Material	RA	luminous flux	Qty
	12W	300*22*45	165-220V transfer to DC48V	Alu+PC	≥90	701Lm/W	200PCS
	24W	600*22*45	165-220V transfer to DC48V	Alu+PC	≥90	851Lm/W	200PCS
	36W	900*22*45	165-220V transfer to DC48V	Alu+PC	≥90	901Lm/W	200PCS
	48W	1200*22*45	165-220V transfer to DC48V	Alu+PC	≥90	901Lm/W	200PCS



Model	Power	Size(m)	Input Voltage	Material	Color	RA	luminous flux	Qty
	6W	110*22*25	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	12W	220*22*25	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	18W	325*22*25	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS

XinleLux

Magnetic



Model	Power	Size(mm)	Input Voltage	Material	Color	RA	luminous flux	Qty
	6W	123*75*34	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	12W	321*75*34	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	18W	345*75*34	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS



Model	Power	Size(mm)	Input Voltage	Material	Color	RA	luminous flux	Qty
	6W	112*23*106	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	12W	223*23*106	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	18W	331*23*106	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS



Model	Power	Size(mm)	Input Voltage	Material	Color	RA	luminous flux	Qty
	6W	112*22*136	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	12W	225*22*136	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS



Model	Power	Size(mm)	Input Voltage	Material	Color	RA	luminous flux	Qty
	12W	50*100	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS
	20W	60*120	165-220V transfer to DC48V	Alu	3K/4K/6K	≥90	1001Lm/W	200PCS



Model	Power	Size(mm)	Input Voltage	Material	Color	luminous flux	Qty
	100W	185*45*22	165-240V transfer to output : 48V	Alu	2.1A 100W	1001Lm/W	200PCS
	200W	258*45*22	165-240V transfer to output : 48V	Alu	4.2A 200W	1001Lm/W	200PCS



Model	Power	Size(mm)	Input Voltage	Material	Color	luminous flux	Qty
	20W	300*35	165-240V transfer to output : 48V	Alu	2.1A 100W	1001Lm/W	200PCS

XinleLux

Bulb

80%
energy conservation



LED BULB



Productparameters



Model	Power	Size(mm)	Color	luminous flux	RA	Qty
	5W	50*100	3000K/6500K	80-100lm/w	≥80	100PCS
	10W	60*110	3000K/6500K	80-100lm/w	≥80	100PCS
	15W	70*130	3000K/6500K	80-100lm/w	≥80	100PCS
	20W	80*145	3000K/6500K	80-100lm/w	≥80	50PCS
	30W	100*170	3000K/6500K	80-100lm/w	≥80	30PCS
	40W	115*200	3000K/6500K	80-100lm/w	≥80	30PCS
	50W	125*215	3000K/6500K	80-100lm/w	≥80	30PCS

XinleLux

LED backlit panel light (Surface)



Product parameters



Model	Power	Size(mm)	Color	luminous flux	Voltage	Qty
	36W	295*295	6000K	90-95lm/w	165-265V	200PCS
	48W	300*300	3000K	90-95lm/w	165-265V	200PCS
	48W	450*450	3000K	90-95lm/w	165-265V	200PCS
	64W	595*595	6000K	90-95lm/w	165-265V	200PCS
	72W	600*600	6000K	90-95lm/w	165-265V	200PCS
	72W	620*620	6000K	90-95lm/w	165-265V	200PCS



Product parameters





Model	Power	Size(mm)	Color	luminous flux	Voltage	Qty
	36W	295*295	6000K	90-95lm/w	165-265V	200PCS
	48W	300*300	3000K	90-95lm/w	165-265V	200PCS
	48W	450*450	3000K	90-95lm/w	165-265V	200PCS
	64W	595*595	6000K	90-95lm/w	165-265V	200PCS
	72W	600*600	6000K	90-95lm/w	165-265V	200PCS
	72W	620*620	6000K	90-95lm/w	165-265V	200PCS




Product parameters



Model	Power	Size(mm)	Color	luminous flux	Voltage	Voltage	Qty
	36W	295*1195	6000K	90-95lm/w	165-265V	165-265V	200PCS
	48W	300*900	3000K	90-95lm/w	165-265V	165-265V	200PCS
	48W	300*1200	3000K	90-95lm/w	165-265V	165-265V	200PCS
	64W	595*1195	6000K	90-95lm/w	165-265V	165-265V	200PCS
	72W	600*1200	6000K	90-95lm/w	165-265V	165-265V	200PCS

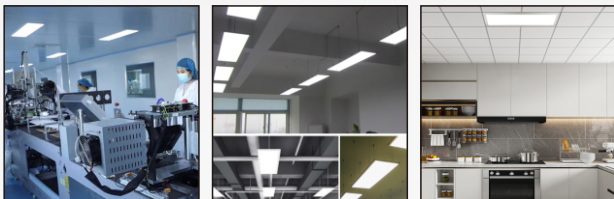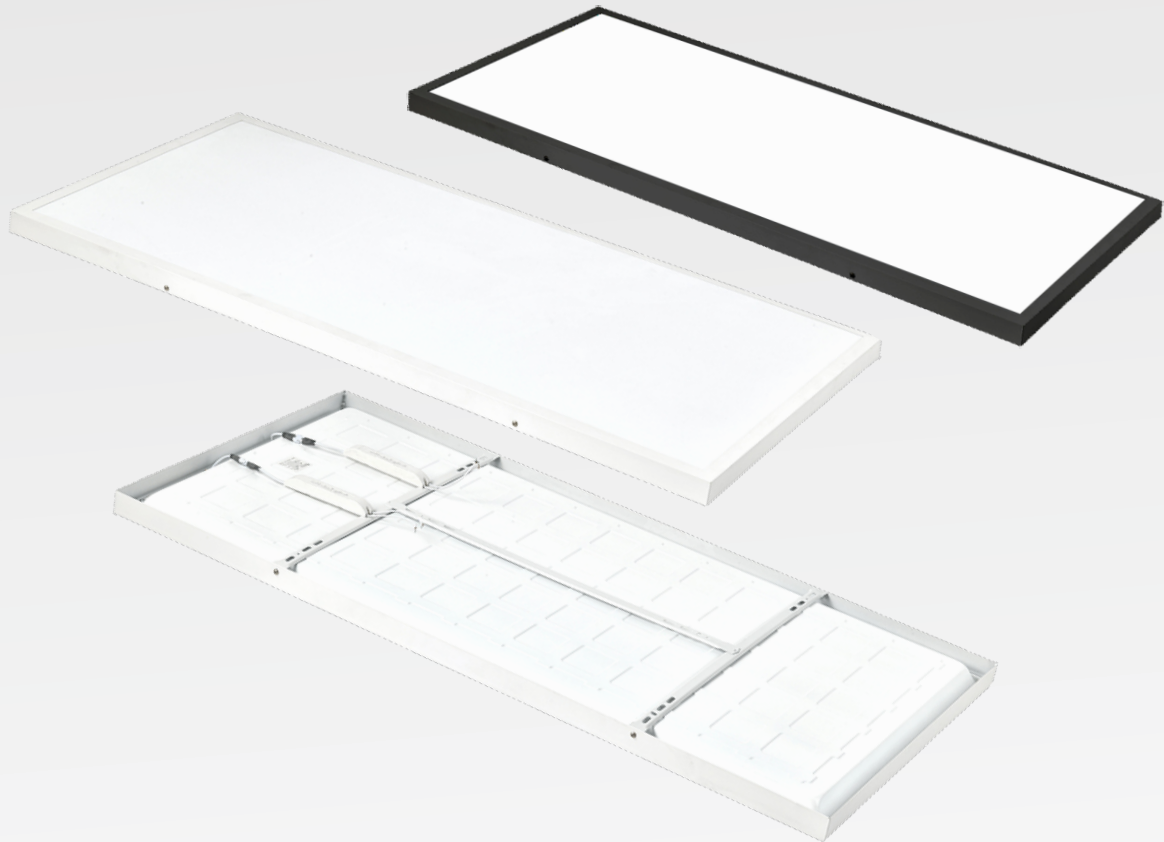

Product parameters



Model	Power	Size(mm)	Color	luminous flux	Voltage	Qty
	36W	295*1195	6000K	90-95lm/w	165-265V	200PCS
	48W	300*900	3000K	90-95lm/w	165-265V	200PCS
	48W	300*1200	3000K	90-95lm/w	165-265V	200PCS
	64W	595*1195	6000K	90-95lm/w	165-265V	200PCS
	72W	600*1200	6000K	90-95lm/w	165-265V	200PCS